


F-RN2216

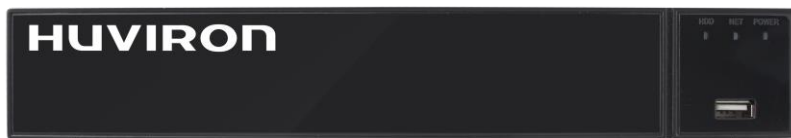

KEY FEATURES

- IP Camera Input: 16CH
- Compression Method: H.265/H.265+/H.264+/H.264
- 2 SATA HDD, up to 16TB
- Support 4K Display Resolution

	MODEL	F-RN2216
System	Main Processor	ARM Cortex A7
	Operating System	Embedded LINUX
Video	Input	16CH(3840 x 2160, 2592 x 1944, 2048 x 1536, 1920 x1080, 1280 x 960, 1280 x 960, 1280 x 720)
	Output	1VGA, 1HD
Audio	Input	/
	Output	1 Port RCA(Linear, 1kΩ)
	Audio Bit Rate	64Kbps
	Audio Compression standard	G711u, G711a
Alarm	Sensor Input	/
	Output	/
	Motion Detection	16 Channel
	Trigger Events	Recording, Email, FTP, Snapshot, Buzzer and Screen Tips, alarm output
Display	HD Output1	4K(3840x2160)/1920x1080/1280x1024/1280x720
	HD Output2	/
	VGA	1920 x 1080/60Hz, 1280 x 1024/60Hz, 1280 x 720/60Hz, 1024 x 768/60Hz
	Display Split	16/9/4CHxD1, 1CHx1080P/3MP/4MP/5MP/4K/12MP
	Digital Zoom	YES
	OSD	Camera Title, Time, Recording, Motion Detection, Event Alarm
Recording	Video Compression	H265/H264/H265+/H264+
	Resolution	4K(4096x2160), 5MP(2592x1944), 4MP(2688x1520/2560x1440), 3MP(2048x1536), 1080P(1920x1080), 960P(1280x720), D1(720x576/720x480)
	Record Rate	PAL: 4K@12x25fp, 5MP@20x25fp, 4MP@25x25fp, 3MP@25x25fp, 1080P@25x25fp, 960P@25x25fp, 720P@25x25fp, D1@25x25fp
	Record Mode	Manual/Timer/Motion Detection

Playback & Backup	Local Sync Playback	1CH 4K@30fps, 1CH 5MP@30fps, 2CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@30fps, 4CH 960P@30fps
	Remote Sync Playback	YES
	Search Mode	ALL, Channel, Manual, Time, Date, Motion Detection, Event Alarm
	Playback Functions	Play, Pause, Stop, Fast Play, Digital Zoom
	Backup Mode	USB Device/Network
Network	Interface	1 RJ45 10M/100/1000M
	Incoming Bandwidth	100MB
	Outgoing Bandwidth	/
	Network Functions	TCP/IP, HTTP, UpnP, DNS, NTP, SMTP, PPPoE, DHCP, FTP, DDNS, RTP, RTSP, RTCP, p2p
	Onvif Version	Support Onvif 2.4
	Cloud Support (P2P)	Yes
	Smart Phone	iPhone, iPad, Android, Android Pad
	POE	/
	WIFI	/
	Storage	Interface Type
Capacity		Up to 16TB capacity
eSATA		/
General	Language	English, Vietnamese
	USB Interface	2 USB 2.0 Interfaces
	RS485	/
	Power Supply	DC12V/4A
	Working Environment	-10~55°C/10~90%
	Dimension (W×D×H)	310*295*46(mm)
Weight	3,5KG (without HDD)	

