


HU-NP226D/I3E-MF



KEY FEATURES

- Ultra 265, H.265, H.264
- IR: Up to 30m
- IP67
- Support Micro SD, up to 256GB
- Support PoE
- Smart Function: Intrusion, Human Body Detection, Motion detection, Tampering alarm, Enter and loiter in a pre-defined virtual region

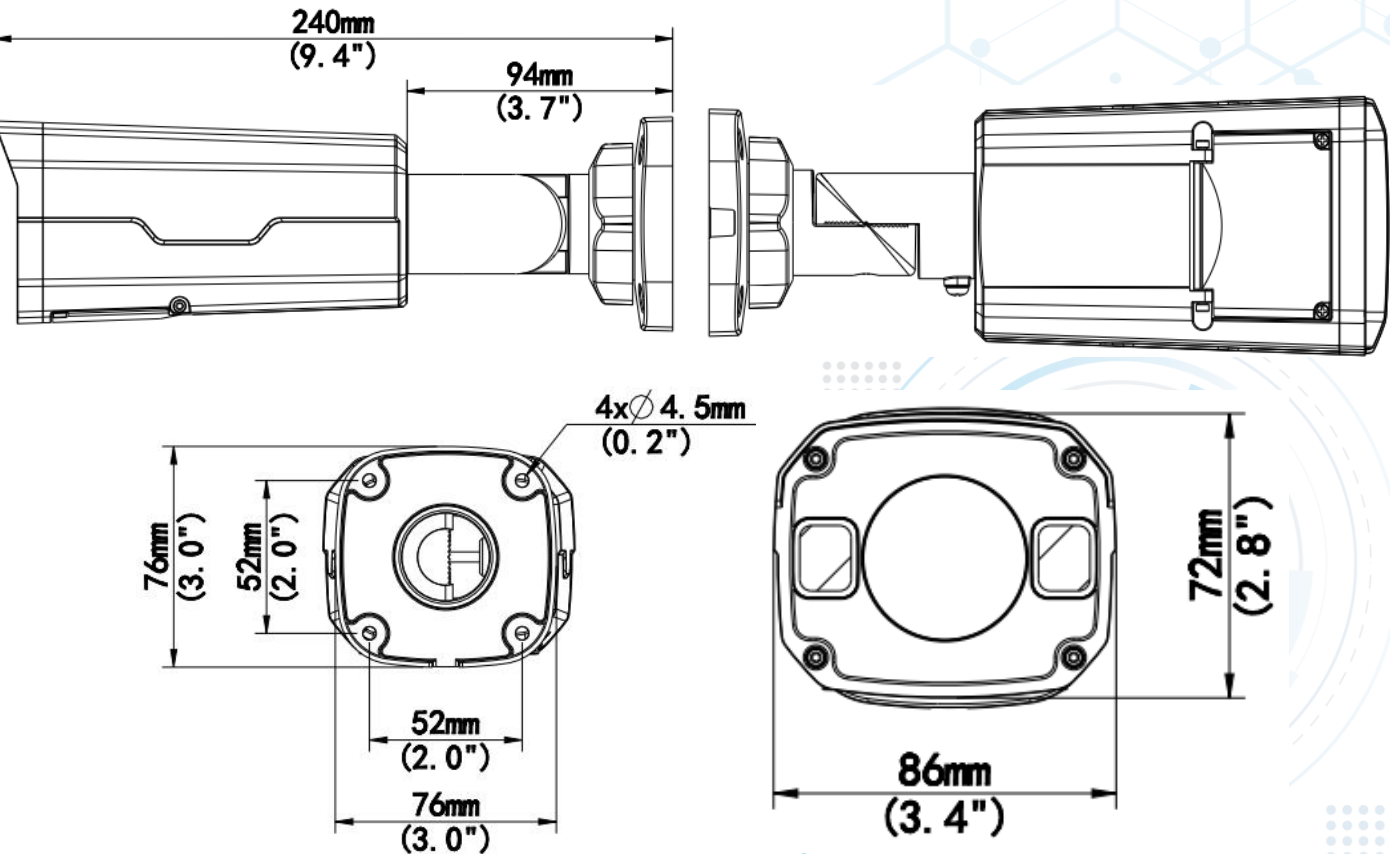

Specification

	Model No.ZZ	HU-NP226D/I3E-MF
Camera	Image Sensor	1/2.7" CMOS sensor
	Resolution	2Mp
	Minimum Illumination	Colour: 0.01Lux (F2.0, AGC ON), 0Lux with IR on
Lens	Focus length	2.8~12mm
	Lens Type	Manual zoom lens
	View Angle	H: 112.7° ~ 28.1°, V: 60.1° ~ 15.4°, O: 146.5° ~ 33.2°
	DORI distance	D: 42 ~ 180m, O: 16.8 ~ 72m, R: 8.4 ~ 36m, I: 4.2 ~ 18m
Night vision	IR range	Up to 30m
Camera features	DNR	2D/3D DNR
	S/N	>52dB
	WDR	DWDR
	HLC	Support
	BLC	Support
	OSD	Up to 4 OSD
	Privacy Mask	Up to 4 areas
	Motion detection	Up to 4 areas
Smart	Behavior Detection	Intrusion, Human Body Detection, Motion detection, Tampering alarm
	Intrusion	Enter and loiter in a pre-defined virtual region
Video	Video compression	Ultra 265, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main Profile, High Profile
	Frame rate	Main Stream: 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; Third Stream: D1 (704*576), Max 30fps
Network	Onvif	ONVIF (Profile S, Profile G, Profile T), API
	Interface	10/100M Base-TX Ethernet
	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
General	Storage	Micro SD, up to 256GB
	Power	DC 12V±25%, PoE(IEEE 802.3af) Max 6.5W
	Waterproof	IP67
	Working Enviroment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Weight	1kg
	Dimensions (Lx W x H)	240.3 × 86.4 × 75.6mm (9.46" × 3.4" × 2.98")