

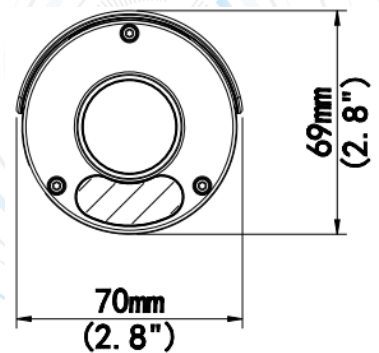
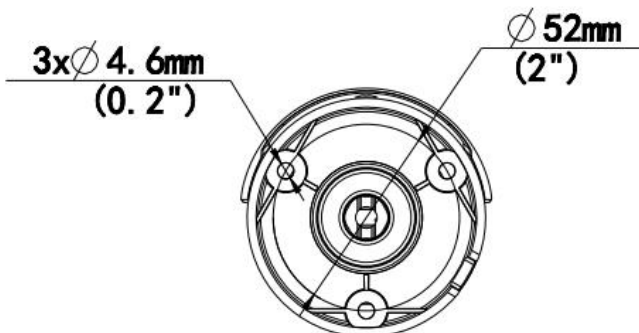
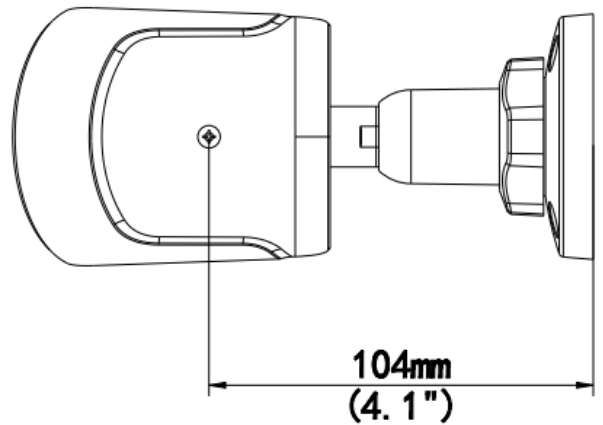


## HU-NP241/I3E

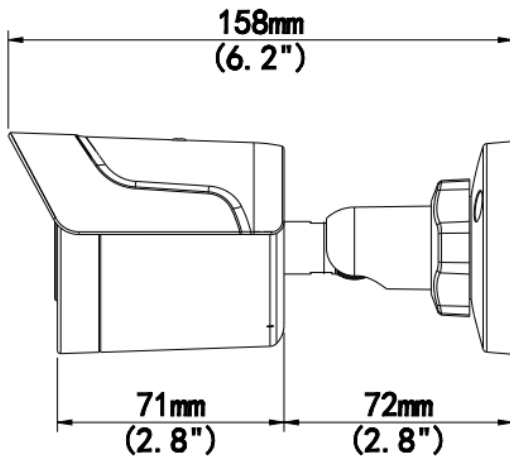

### KEY FEATURES

- Ultra 265, H.265, H.264
- IR range: Up to 30m
- IP67
- PoE

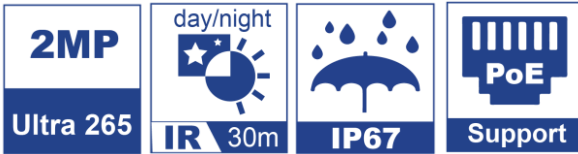

## Specification

	Model No.ZZ	HU-NP241/I3E
Camera	Image Sensor	1/2.7" CMOS sensor
	Resolution	2Mp
	Minimum Illumination	Colour: 0.02Lux (F2.0, AGC ON), 0Lux with IR on
Lens	Focus length	4.0mm
	Lens Type	Fixed
	View Angle	H: 86.5°, V: 44.1°, O: 106.4°
	DORI distance	D: 66.7m, O: 26.7m, R: 13.3m, I: 6.7m
Night vision	IR range	Up to 30m
Camera features	DNR	2D/3D DNR
	S/N	>52dB
	WDR	DWDR
	HLC	Support
	BLC	Support
	OSD	Up to 4 OSD
	Privacy Mask	Up to 4 areas
	Motion detection	Up to 4 areas
Video	Video compression	Ultra 265, H.265, H.264
	H.264 code profile	Baseline profile, Main Profile
	Frame rate	Main Stream: 1080P (1920*1080), Max 25fps; Sub Stream: 4CIF (704*576), Max 25fps; Third Stream: CIF (352*288), Max 25fps
Network	Onvif	ONVIF (Profile T), API
	Interface	10/100M Base-TX Ethernet
	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
General	Power	DC 12V±25%, PoE (IEEE 802.3af), Max 5.5W
	Waterproof	IP67
	Working Enviroment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Weight	0.27kg
	Dimensions	167.3 × 62.9 × 62.7mm (6.6" × 2.5" × 2.5")