


HU-NZ2005/I3E





KEY FEATURES


- Ultra 265, H.265, H.264
- IR range: Up to 30m
- Built-in Mic
- Support Micro SD, up to 256GB
- Support PoE

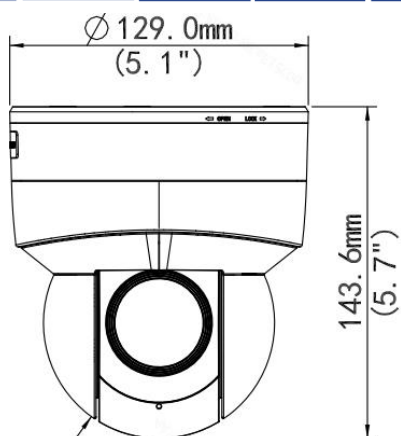

Ø 100.0mm
(3.9")

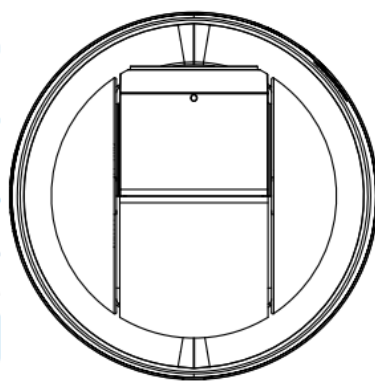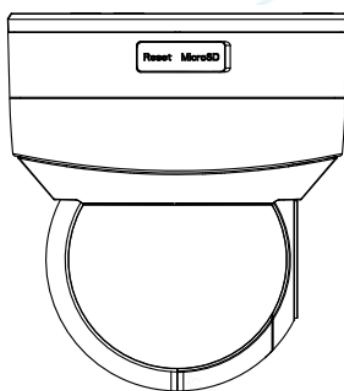

Ø 108.5mm
(4.3")



3-Ø 4.0mm
(0.16")

Specification

	Model No.ZZ	HU-NZ2005/I3E
Camera	Image Sensor	1/2.9" CMOS sensor
	Resolution	2Mp
	Minimum Illumination	Colour: 0.03Lux (F1.2, AGC ON), 0Lux with IR on
Lens	Focus length	2.7~13.5mm
	Lens Type	Auto focus, Zoom Motorized
	Optical Zoom	5x
	View Angle	H: 29.1°~ 104.3°, V:16°~ 55.1°, O: 34.5°~ 142.9°
	DORI distance	D: 43.4~217m, O: 17.4~86.8m, R: 8.7~43.4m, I: 4.3~21.7m
Night vision	IR range	Up to 30m
Camera features	DNR	2D/3D DNR
	S/N	>52dB
	WDR	DWDR
	HLC	Support
	BLC	Support
	Flip	Normal/Vertical/Horizontal/180°
	Privacy Mask	Up to 4 areas
	Motion detection	Up to 4 areas
Video	Video compression	Ultra 265, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main Profile
	Frame rate	Main Stream:1080P (1920×1080):Max. 30 fps; Sub Stream:4CIF (704×576):Max. 30 fps; Third Stream: 4CIF (704×576): Max. 30 fps

Specification

Audio	Built-in Mic	Support
Network	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Client	Hu-Viewer, Hu-VMS
	Onvif	ONVIF (Profile S, Profile T), API
	Interface	10/100M Base-TX Ethernet
PTZ	Preset	1024
	Pan range	350°
	Pan Speed	0.1° ~ 60°/s, preset speed 60°/s
	Tilt range	90°
	Tilt speed	0.1° ~ 50°/s, preset speed 50°/s
	Patrol	Preset patrol, Route patrol
General	Storage	Micro SD, up to 256GB
	Power	DC 12V±25%, PoE (IEEE 802.3af), Max 12W
	Working Enviroment	-10°C ~ 50°C (14°F to 122°F), Humidity:≤ 95% RH(non-condensing)
	Weight	0.75kg
	Dimensions	Φ129mm×143mm(Φ5.07" x5.63")