
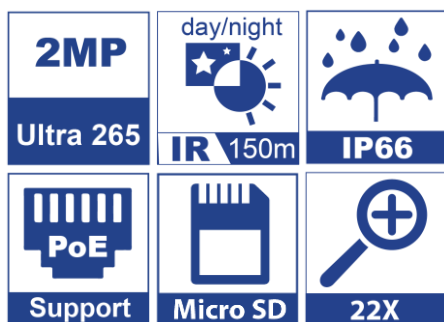


HU-NZ2322/I15

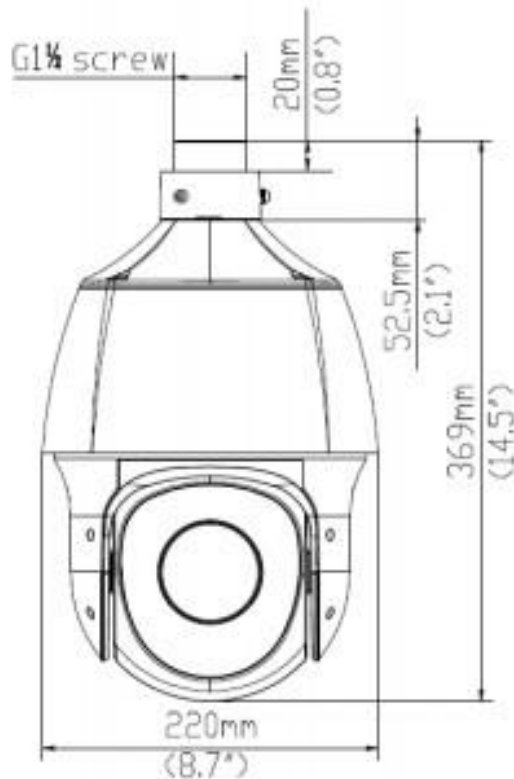

KEY FEATURES

- Ultra 265, H.265, H.264
- IR range: Up to 150m
- Optical Zoom 22x
- IP66
- Support Micro SD, up to 256GB
- Support PoE

Specification

	Model No.ZZ	HU-NZ2322/I15
Camera	Image Sensor	1/2.8" CMOS sensor
	Resolution	2Mp
	Minimum Illumination	Colour: 0.001Lux (F1.5, AGC ON), 0Lux with IR on
Lens	Focus length	5.2~114.4mm
	Lens Type	Auto focus, Zoom Motorized
	Optical Zoom	22x
	View Angle	H: 54.4°~ 3.44°, V:39.2°~ 1.9°, O: 66.9°~ 4.1°
	DORI distance	D: 83.6~1838.6m, O: 33.4~735.4m, R: 16.7~367.7m, I: 8.4~183.9m
Night vision	IR range	Up to 150m
Camera features	DNR	2D/3D DNR
	S/N	>55dB
	WDR	DWDR
	HLC	Support
	BLC	Support
	Defog Mode	Digital Defog
	Flip	Normal/Vertical/Horizontal/180°
	Privacy Mask	Up to 4 areas
	Motion detection	Up to 4 areas
Video	Video compression	Ultra 265, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main Profile, High Profile
	Frame rate	Main Stream: 2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream: D1 (720*576), Max 30fps

Specification

Network		Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Client	Hu-Viewer, Hu-VMS
	Onvif	ONVIF (Profile S, Profile T), API
	Interface	10/100M Base-TX Ethernet
PTZ	Preset	1024
	Pan range	360°
	Pan Speed	0.1° ~ 240°/s, preset speed 300°/s
	Tilt range	90°
	Tilt speed	0.1° ~ 80°/s, preset speed 80°/s
	Patrol	Preset patrol, Route patrol, Recorded patrol
	Home Position	Support
General	Storage	Micro SD, up to 256GB
	Power	DC 12V±10%, Max 16 ~ 30W
	Working Enviroment	-40°C ~ 65°C (-40°F ~ 149°F), Humidity: ≤95% RH (non-condensing)
	Waterproof	IP66
	Weight	3kg
	Dimensions	Φ220 × 369mm (Φ8.7" × 14.5")