



## HU-NZ5104/I5E

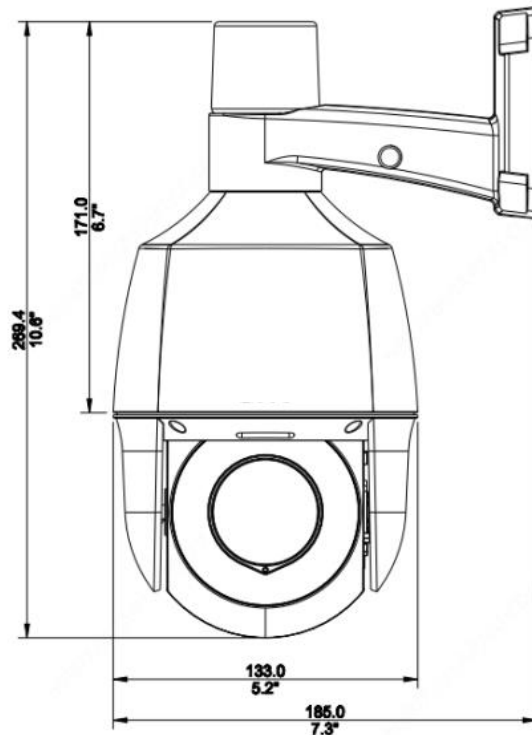

### KEY FEATURES

- Ultra 265, H.265, H.264
- IR range: Up to 50m
- IP66
- Two-way Audio
- Alarm Light
- Support Micro SD, up to 256GB
- Support PoE
- Cross Line, Intrusion, Enter Area, Leave Area detection, Motion detection, Tampering alarm, Audio Detection

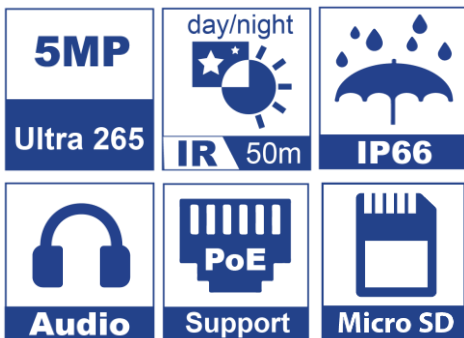

## Specification

	Model No.ZZ	HU-NZ5104/ISE
Camera	Image Sensor	1/2.7" CMOS sensor
	Resolution	5Mp
	Minimum Illumination	Colour: 0.003Lux (F2.0, AGC ON), 0Lux with IR on
Lens	Focus length	2.8~12mm
	Lens Type	Auto focus, Zoom Motorized
	Optical Zoom	4x
	View Angle	H: 20.5°~ 112.9°, V:16.8°~ 59.1°, O: 21.8°~ 121.2°
	DORI distance	D: 63.0~270.0m, O: 25.2~108.0m, R: 12.6 ~54.0m, I: 6.3~27.0m
Night vision	IR range	Up to 50m
	Warm light range	Up to 10m
Camera features	DNR	2D/3D DNR
	S/N	>55dB
	WDR	120dB
	HLC	Support
	BLC	Support
	Defog	Digital Defog
	Flip	Normal/Vertical/Horizontal/180°
	Privacy Mask	Up to 8 areas
	Motion detection	Up to 4 areas
Smart	Smart Intrusion Prevention	Cross Line, Intrusion, Enter Area, Leave Area detection; Motion detection; Tampering alarm, Audio Detection
Video	Video compression	Ultra 265, H.265, H.264, MJPEG
	H.264 code profile	Baseline profile, Main Profile
	Frame rate	Main Stream: 2880*1620/2560*1440/ 2304*1296@25fps; 1920*1080@30fps; Sub Stream: 1280*720/ 720*576/ 640*360/ 704*288/ 352*288@30fps; Third Stream: 720*576/704*288/ 640*360/ 352*288, Max 30fps;

## Specification

<b>Audio</b>	Built-in Mic	Support
	Built-in Speaker	Support
	Audio Compression	G.711U, G711A
	Suppression	Support
	Sampling Rate	8kHz
<b>Interface</b>	Alarm light	Support
<b>Network</b>	Web Browser	Plug-in required live view: IE9+, Chrome 41 and below, Firefox 52 and below
	Client	Hu-Viewer, Hu-VMS
	Onvif	ONVIF (Profile S, Profile T), API
	Interface	10/100M Base-TX Ethernet
<b>PTZ</b>	Preset	256
	Pan range	0° ~ 345°
	Pan Speed	0.1° ~ 50°/s, preset speed 50°/s
	Tilt range	-10° ~ 110°/s
	Tilt speed	0.1° ~ 40°/s, preset speed 40°/s
	Patrol	Preset patrol, Route patrol
<b>General</b>	Storage	Micro SD, up to 256GB
	Power	DC 12V±25%, PoE (IEEE 802.3at), Max 18W
	Waterproof	IP66
	Surge Protection	4kV
	Working Enviroment	-20°C ~ 60°C (-4°F to 140°F), Humidity:≤ 95% RH(non-condensing)
	Weight	0.87kg
	Dimensions	Φ133mm*269.4mm (Φ5.2" x 10.6" )